

LOGAN SV



MULTIDECK Semi

LOGAN SV



High Efficiency

Higher Evap. Temp $\geq -7^{\circ}\text{C}$



Standard Power

Reliable electrical integration



Optimal Cooling

Stable temperature



Smart Control

Digital Controller



Climate Type

M3 Climate Design



More Capacity

+ 5% Storage
+ 20% Display



Energy Efficient

Lower operating cost



Tropical Ready

High Temp & Humidity



TEMPERATURE RANGE

-1 ~ 7° C
-1 ~ 5° C
4 ~ 12° C

WIDTH (mm)

1250 – 3750

HEIGHT (mm)

1300
1500
1700

DEPTH (mm)

855
1055

POWER

220 V / 60 HZ

EFFICIENCY

GRADE 2


TEMP GRADE

M2
M1



LOGAN SERIES SEMI-VERTICAL MULTIDECKS

STANDARD MODEL	(855 DEPTH) 1300 / 1500MM (HEIGHT)			
	12 / 17 / 18 / 25 / 37	12L / 17L / 18L / 25L / 37L	17SC / 17SCL / 17SCN	
Width (mm)	1250 / 1700 / 1875 / 2500 / 3750			1780
Depth (mm)	855			880
Height (mm)	1300		1500	1300 / 1500 / 1700
Op. Temperature (°C)	-1~7	-1~5	-1~7	1~5
Temperature Grade	3 M2	3 M1	3 M2	3 M1
Rated Voltage (V)	220V			
Rated Frequency (Hz)	60Hz			
Net Weight (kg)	148 / 176 / 186 / 276 / 364	138 / 176 / 186 / 276 / 364	150 / 205 / 280 / 420	204 / 240 / 270
Display Area (m²)	1.52 / 1.8 / 1.99 / 2.65 / 3.98	1.33 / 1.8 / 1.99 / 2.65 / 3.98	1.58 / 2.15 / 2.36 / 3.15 / 4.73	1.95 / 2.3 / 2.53
Effective Volume (m³)	0.49 / 0.54 / 0.6 / 0.8 / 0.19	0.4 / 0.54 / 0.6 / 0.8 / 1.19	0.51 / 0.69 / 0.76 / 1.01 / 1.52	0.64 / 0.75 / 0.83
Energy Efficiency	Grade 2			

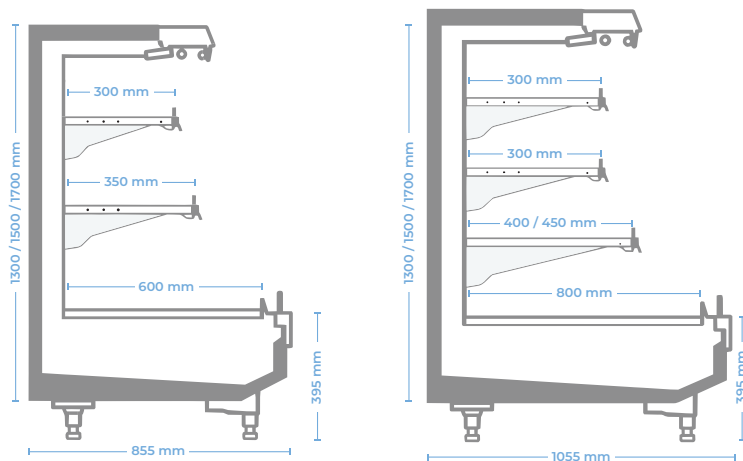

LOGAN SERIES SEMI-VERTICAL MULTIDECKS

STANDARD MODEL	(1055 DEPTH) 1300 / 1500MM (HEIGHT)				
	12 / 17 / 18 / 25 / 37		12L / 17L / 18L / 25L 37L		218SC / 218SCL
Width (mm)	1250 / 1700 / 1875 / 2500 / 3750				2180
Depth (mm)	1055				
Height (mm)	1300	1500	1300	1500	1300 / 1500
Op. Temperature (°C)	-1~7	-1~5	-1~7	-1~5	4~12
Temperature Grade	3 M2	3 M1	3 M2	3 M1	3 S
Rated Voltage (V)	220 V				
Rated Frequency (Hz)	60Hz				
Net Weight (kg)	180 / 230 / 251 / 299 / 449		210 / 260 / 290 / 346 / 519		260 / 300
Display Area (m²)	1.74 / 2.36 / 2.65 / 3.15 / 4.73		1.88 / 2.74 / 3.16 / 3.65 / 5.48		3.31 / 3.90
Effective Volume (m³)	0.5 / 0.74 / 0.83 / 0.99 / 1.49		0.62 / 0.93 / 1.04 / 1.24 / 1.85		0.61 / 0.72
Energy Efficiency	Grade 2				

NOMENCLATURE

LOGAN SV						
L	4	D	12	A	5	R
DEPTH (mm)	SHELVES	CATEGORY	LENGTH (mm)	HEIGHT (mm)	REFRIGERANT	MODULE
E = 855 S = 880 L = 1055	1 2 3 4	D = All M = Meat	12 = 1200 17 = 1700 17-SC / L = 1780 18 = 1800 21 = 2100 25 = 2500 37 = 3750	A = 2000 L = 2270 R = 1500	1 = Co2 2 = R290 3 = Glycol 4 = R454C 5 = R449A 6 = HFC (R404/R507)	R = Remote P = Plug in SP = Semi Plug in

