



Product Catalog

2026

COMMERCIAL REFRIGERATION
REFRIGERACIÓN COMERCIAL



More Information :

Interested in any of our equipment? Scan the QR code and we will get in touch with you soon.

LOGAN



MULTIDECK Open Series

LOGAN



High Efficiency
Higher Evap. Temp $\geq -6^{\circ}\text{C}$



Standard Power
Reliable electrical integration



Optimal Cooling
Stable temperature



Smart Control
Digital Controller



Climate Type
25 $^{\circ}\text{C}$ - 60% RH



More Capacity
+ 25% Storage
+ 10% Display



Energy Efficient
Lower operating cost



Tropical Ready
High Temp & Humidity



TEMPERATURE RANGE

-1 ~ 7 $^{\circ}\text{C}$
-1 ~ 5 $^{\circ}\text{C}$
4 ~ 12 $^{\circ}\text{C}$

WIDTH (mm)

1250 - 3750

HEIGHT (mm)

1300
1500
1700

DEPTH (mm)

855
880

POWER

220 V / 60 HZ

EFFICIENCY

GRADE 2

TEMP GRADE

M2
M1
S




LOGAN A/L SERIES GLASS DOOR MULTIDECKS

| STANDARD MODEL | HEIGHT SHELF DEPTH 500 | | | | | HEIGHT SHELF DEPTH 400 | | | | |
|------------------------------------|------------------------|------|------|------|------|------------------------|------|------|------|------|
| | 12 | 18 | 21 | 25 | 37 | 12 | 18 | 21 | 25 | 37 |
| Width (mm) | 1250 | 1880 | 2100 | 2500 | 3750 | 1250 | 1880 | 2100 | 2500 | 3750 |
| Depth (mm) | 1055 | | | | | 855 | | | | |
| Height (mm) | 2000 / 2270 | | | | | | | | | |
| Op. Temperature (°C) | -1~7 / -1~5 | | | | | | | | | |
| Temperature Grade | 3 M2 / 3 M1 | | | | | | | | | |
| Rated Voltage (V) | 220V | | | | | | | | | |
| Rated Frequency (Hz) | 60Hz | | | | | | | | | |
| Net Weight (kg) | 245 | 340 | 375 | 440 | 645 | 230 | 300 | 320 | 410 | 600 |
| Display Area (m ²) | 2,5 | 3,75 | 4,2 | 5 | 7,5 | 2,37 | 3,23 | 3,56 | 4,75 | 7,12 |
| Effective Volume (m ³) | 1,14 | 1,71 | 1,91 | 2,28 | 3,42 | 0,89 | 1,21 | 1,34 | 1,78 | 2,68 |
| Energy Efficiency | Grade 2 | | | | | | | | | |

| STANDARD MODEL | LU HEIGHT | | | | EU HEIGHT | | | |
|------------------------------------|-----------|------|------|------|-----------|------|------|------|
| | 9EA | 9IA | 9EL | 9IL | 9EA | 9IA | 9EL | 9IL |
| Width (mm) | 1380 | | 1580 | | 1380 | | | |
| Depth (mm) | 1055 | | | | 855 | | | |
| Height (mm) | | | | | | | | |
| Op. Temperature (°C) | 4~12 | | | | | | | |
| Temperature Grade | 3 S | | | | | | | |
| Rated Voltage (V) | | | | | | | | |
| Rated Frequency (Hz) | | | | | | | | |
| Net Weight (kg) | 250 | 380 | 310 | 430 | 240 | 230 | 290 | 255 |
| Display Area (m ²) | 3,08 | 1,96 | 3,46 | 2,22 | 2,84 | 2,18 | 3,12 | 2,44 |
| Effective Volume (m ³) | 0,92 | 0,88 | 1,14 | 1,13 | 0,96 | 0,82 | 1,16 | 0,96 |
| Energy Efficiency | Grade 2 | | | | | | | |

NOMENCLATURE

| LOGAN | | | | | | |
|---------------------|-----------------------|---------------------|--|----------------------|---|--|
| L | 4 | D | 25 | A | 5 | R |
| DEPTH (mm) | SHELVES | CATEGORY | LENGTH | HEIGHT | REFRIGERANT | MODULE |
| E = 855 L = 1055 | 2 3 4 5 6 | D = All M = Meat | 12 = 1250 17 = 1700 18 = 1875 21 = 2100 25 = 2500 37 = 3750 9E = 90° Ext 9I = 90° Int | A = 2000 L = 2270 | 1 = Co2 2 = R290 3 = Glycol 4 = R454C 5 = R449A 6 = HFC (R404/R507) | R = Remote P = Plug in SP = Semi Plug in |

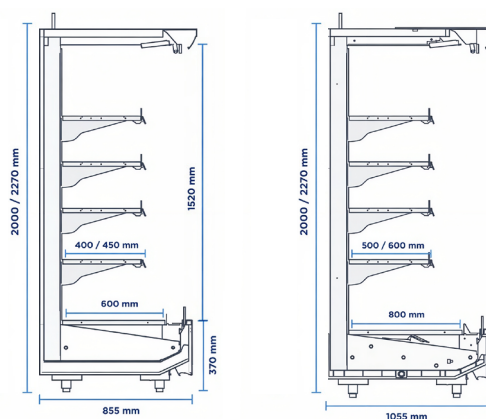

LOGAN 2D



MULTIDECK Glass Door Series

LOGAN 2D



High Efficiency

Higher Evap. Temp $\geq -4^{\circ}\text{C}$



Standard Power

Reliable electrical integration



Optimal Cooling

Stable temperature



Smart Control

Digital Controller



Climate Type

M3 Climate Design



More Capacity

+ 25% Storage
+ 10% Display



Energy Efficient

Lower operating cost



Tropical Ready

High Temp & Humidity



TEMPERATURE RANGE

-1 ~ 7° C

-1 ~ 5° C

WIDTH (mm)

1250 – 3750

HEIGHT (mm)

1500

2000

2270

DEPTH (mm)

855

1055

POWER

220 V / 60 HZ

EFFICIENCY

GRADE 2

TEMP GRADE


M2

M1



LOGAN SERIES SEMI-VERTICAL MULTIDECKS

| STANDARD MODEL | 1055 DEPTH 2000MM HEIGHT SHELF DEPTH 500 | 855 DEPTH 2000MM HEIGHT SHELF DEPTH 400 | 855 DEPTH 1500MM HEIGHT SHELF DEPTH 400 |
|------------------------------------|--|---|---|
| | 12 / 18 / 21 / 25 / 37 | | |
| Width (mm) | 1250 / 1875 / 2100 / 2500 / 3750 | | |
| Depth (mm) | 1055 | 855 | |
| Height (mm) | 2000 / 2270 | | 1500 |
| Op. Temperature (°C) | -1-7 / -1-5 | | -1-5 |
| Temperature Grade | 3 M2 / 3 M1 | | 3 M1 |
| Rated Voltage (V) | 220V | | |
| Rated Frequency (Hz) | 60Hz | | |
| Net Weight (kg) | 285 / 410 / 450 / 530 / 765 | 270 / 370 / 405 / 500 / 725 | 208 / 276 / 294 / 380 / 545 |
| Display Area (m ²) | 1.67 / 2.51 / 2.81 / 3.34 / 5.01 | 1.53 / 2.08 / 2.29 / 3.06 / 4.59 | 0.98 / 1.34 / 1.47 / 1.96 / 2.94 |
| Effective Volume (m ³) | 0.89 / 1.32 / 1.48 / 1.77 / 2.66 | 0.73 / 0.99 / 1.09 / 1.46 / 2.19 | 0.88 / 1.19 / 1.31 / 1.75 / 2.63 |
| Energy Efficiency | Grade 2 | | |

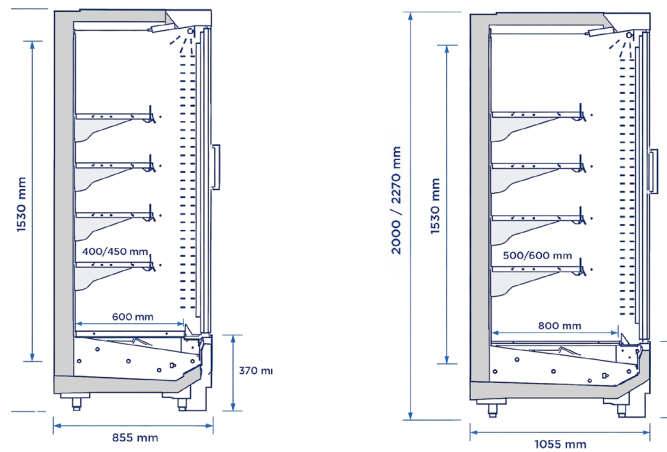

NOMENCLATURE

| LOGAN 2D | | | | | | | |
|----------|---------------------|---------|---------------------|-------------|----------------------------------|---------------------|--|
| 2D | L | 4 | D | 12 | A | 5 | R |
| DOORS | DEPTH (mm) | SHELVES | CATEGORY | LENGTH (mm) | HEIGHT (mm) | REFRIGERANT | MODULE |
| 2D | E = 855 L = 1055 | 2 | D = All M = Meat | 12 = 1250 | A = 2000 L = 2270 R = 1500 | 1 = Co2 | R = Remote P = Plug in SP = Semi Plug in |
| 3D | | 3 | | 17 = 1700 | | 2 = R290 | |
| 4D | | 4 | | 18 = 1875 | | 3 = Glycol | |
| 5D | | 5 | | 21 = 2100 | | 4 = R454C | |
| 6D | | 6 | | 25 = 2500 | | 5 = R449A | |
| | | | | 37 = 3750 | | 6 = HFC (R404/R507) | |



LOGAN WC



MULTIDECK Warehouse Club

LOGAN WC



High Efficiency

Higher Evap. Temp $\geq -5^{\circ}\text{C}$



Standard Power

Reliable electrical integration



Optimal Cooling

Stable temperature



Smart Control

Mechanic Controller



Climate Type

25°C 60% RH



Capacity

$6.41\text{ m}^2 \cdot 3462\text{ L}$



Energy Efficient

Lower operating cost



Tropical Ready

High Temp & Humidity

TEMPERATURE
RANGE

-1 ~ 7°C

WIDTH
(mm)

3750

HEIGHT
(mm)

2050

DEPTH
(mm)

1050

POWER

220 V / 60 HZ

REFRIGERANT

R404A

APPLICATION

Beverages
Dairy




LOGAN WC

| | | |
|---------------------------------------|--|----------|
| Cabinet type | Open multideck (air curtain) | |
| Application | Beverages, dairy products | |
| Temperature range (°C) | -1~7°C | |
| Refrigerant | R404A | |
| Evaporating temperature (°C) | -5°C | |
| Cooling capacity (kW) | 5.08 | 6.40 |
| Ambient conditions | 25°C 60% | 27°C 70% |
| Power supply | 220V 50Hz | |
| Defrost heater (W/A) | / | / |
| Anti-condensation heater (W/A) | 60 | 0.27 |
| Fan motor (W/A) | 180 | 0.82 |
| Lighting (W/A) | 240 | 1.09 |
| Pipe diameter | Liquid 3/8" Suction 3/4" | |
| Controller | HK-90W | |
| Expansion valve | Thermostatic expansion valve | |
| External dimensions (mm) | 3750×1050×2050 | |
| Packaging dimensions (mm) | 3930×1166×2225 | |
| Insulation | Rigid polyurethane foam | |
| Display area (m ²) | 6.41 | |
| Net volume (L) | 3462 | |
| Opening width (mm) | 1491 | |
| Shelf dimensions (mm) × No. of levels | 500×4 | |
| Kick plate width (mm) | 780 | |
| Net weight (kg) | 513 | |
| Gross weight (kg) | 618.2 | |
| Drain pipe diameter | Ø50 | |
| Standard accessories | Rubber drain trap | |
| Optional accessories | Glass, solid with mirror, solid side panel | |

NOMENCLATURE

| LOGAN | | | | | | |
|---------------------|-----------------------|---------------------|--|----------------------|---|--|
| L | 4 | D | 25 | A | 5 | R |
| DEPTH (mm) | SHELVES | CATEGORY | LENGTH | HEIGHT | REFRIGERANT | MODULE |
| E = 855 L = 1055 | 2 3 4 5 6 | D = All M = Meat | 12 = 1250 17 = 1700 18 = 1875 21 = 2100 25 = 2500 37 = 3750 9E = 90° Ext 9I = 90° Int | A = 2000 L = 2270 | 1 = Co2 2 = R290 3 = Glycol 4 = R454C 5 = R449A 6 = HFC (R404/R507) | R = Remote P = Plug in SP = Semi Plug in |

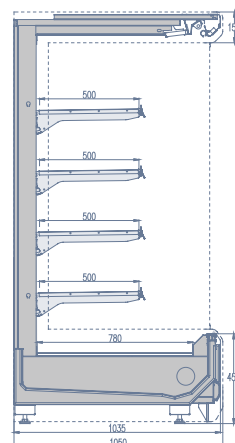

LOGAN SV



MULTIDECK Semi

LOGAN SV



High Efficiency

Higher Evap. Temp $\geq -7^{\circ}\text{C}$



Standard Power

Reliable electrical integration



Optimal Cooling

Stable temperature



Smart Control

Digital Controller



Climate Type

M3 Climate Design



More Capacity

+ 5% Storage
+ 20% Display



Energy Efficient

Lower operating cost



Tropical Ready

High Temp & Humidity



TEMPERATURE RANGE

-1 ~ 7° C
-1 ~ 5° C
4 ~ 12° C

WIDTH (mm)

1250 – 3750

HEIGHT (mm)

1300
1500
1700

DEPTH (mm)

855
1055

POWER

220 V / 60 HZ

EFFICIENCY

GRADE 2


TEMP GRADE

M2
M1



LOGAN SERIES SEMI-VERTICAL MULTIDECKS

| STANDARD MODEL | (855 DEPTH) 1300 / 1500MM (HEIGHT) | | | | |
|------------------------------------|------------------------------------|---------------------------------|----------------------------------|----------------------|------|
| | 12 / 17 / 18 / 25 / 37 | | 12L / 17L / 18L / 25L / 37L | 17SC / 17SCL / 17SCN | |
| Width (mm) | 1250 / 1700 / 1875 / 2500 / 3750 | | | 1780 | |
| Depth (mm) | 855 | | | 880 | |
| Height (mm) | 1300 | | 1500 | | |
| Op. Temperature (°C) | -1~7 | -1~5 | -1~7 | 1~5 | 4~12 |
| Temperature Grade | 3 M2 | 3 M1 | 3 M2 | 3 M1 | 3 S |
| Rated Voltage (V) | 220V | | | | |
| Rated Frequency (Hz) | 60Hz | | | | |
| Net Weight (kg) | 148 / 176 / 186 / 276 / 364 | 138 / 176 / 186 / 276 / 364 | 150 / 205 / 280 / 420 | 204 / 240 / 270 | |
| Display Area (m ²) | 1.52 / 1.8 / 1.99 / 2.65 / 3.98 | 1.33 / 1.8 / 1.99 / 2.65 / 3.98 | 1.58 / 2.15 / 2.36 / 3.15 / 4.73 | 1.95 / 2.3 / 2.53 | |
| Effective Volume (m ³) | 0.49 / 0.54 / 0.6 / 0.8 / 0.19 | 0.4 / 0.54 / 0.6 / 0.8 / 1.19 | 0.51 / 0.69 / 0.76 / 1.01 / 1.52 | 0.64 / 0.75 / 0.83 | |
| Energy Efficiency | Grade 2 | | | | |

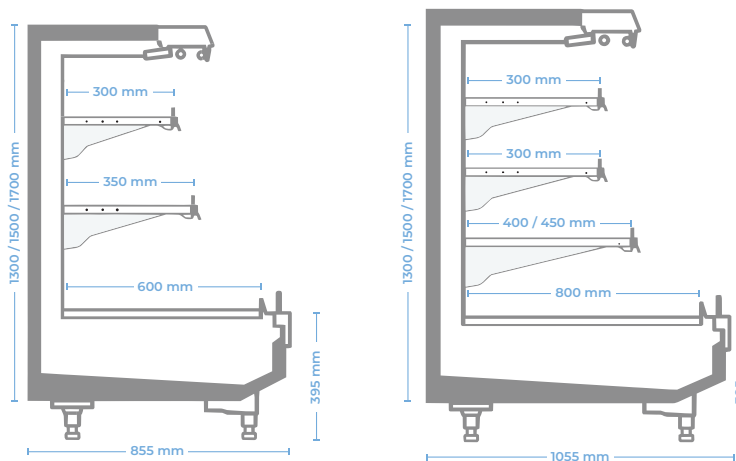

LOGAN SERIES SEMI-VERTICAL MULTIDECKS

| STANDARD MODEL | (1055 DEPTH) 1300 / 1500MM (HEIGHT) | | | | |
|------------------------------------|-------------------------------------|------|----------------------------------|------|----------------|
| | 12 / 17 / 18 / 25 / 37 | | 12L / 17L / 18L / 25L 37L | | 218SC / 218SCL |
| Width (mm) | 1250 / 1700 / 1875 / 2500 / 3750 | | | | 2180 |
| Depth (mm) | 1055 | | | | |
| Height (mm) | 1300 | 1500 | 1300 | 1500 | 1300 / 1500 |
| Op. Temperature (°C) | -1~7 | -1~5 | -1~7 | -1~5 | 4~12 |
| Temperature Grade | 3 M2 | 3 M1 | 3 M2 | 3 M1 | 3 S |
| Rated Voltage (V) | 220 V | | | | |
| Rated Frequency (Hz) | 60Hz | | | | |
| Net Weight (kg) | 180 / 230 / 251 / 299 / 449 | | 210 / 260 / 290 / 346 / 519 | | 260 / 300 |
| Display Area (m ²) | 1.74 / 2.36 / 2.65 / 3.15 / 4.73 | | 1.88 / 2.74 / 3.16 / 3.65 / 5.48 | | 3.31 / 3.90 |
| Effective Volume (m ³) | 0.5 / 0.74 / 0.83 / 0.99 / 1.49 | | 0.62 / 0.93 / 1.04 / 1.24 / 1.85 | | 0.61 / 0.72 |
| Energy Efficiency | Grade 2 | | | | |

NOMENCLATURE

| LOGAN SV | | | | | | |
|---|------------------|-----------------------------------|---|---|--|---|
| L | 4 | D | 12 | A | 5 | R |
| DEPTH (mm) | SHELVES | CATEGORY | LENGTH (mm) | HEIGHT (mm) | REFRIGERANT | MODULE |
| E = 855 S = 880 L = 1055 | 1 2 3 4 | D = All M = Meat | 12 = 1200 17 = 1700 17-SC / L = 1780 18 = 1800 21 = 2100 25 = 2500 37 = 3750 | A = 2000 L = 2270 R = 1500 | 1 = Co2 2 = R290 3 = Glycol 4 = R454C 5 = R449A 6 = HFC (R404/R507) | R = Remote P = Plug in SP = Semi Plug in |



COTOPAXI



REACH IN Frozen Products Series

COTOPAXI



High Efficiency

Higher Evap. Temp $\geq -28^{\circ}\text{C}$



Standard Power

Reliable operation



Temperature Range

Chiller & Freezer



Smart Control

Digital Controller



Climate Type

M3 environment



More Capacity

+ 5% Storage
+ 20% Display



Energy Efficient

Optimized performance



Tropical Ready

High Temp & Humidity



TEMPERATURE RANGE

0~7°C
-18°C

WIDTH (mm)

1562 – 3905

HEIGHT (mm)

2000
2270

DEPTH (mm)

800
945

POWER

220 V / 60 HZ

EFFICIENCY

GRADE 1
GRADE 2


TEMP GRADE

M2
L1



COTOPAXI SERIES NARROW GLASS CHILLER MULTIDECKS / FREEZER

| STANDARD MODEL | FREEZER / CHILLER | | | | | | | | FREEZER | | | | |
|------------------------------------|-------------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|--------------|
| | 2D MT | 3D MT | 4D MT | 5D MT | 2D LT | 3D LT | 4D LT | 5D LT | 2D LT | 3D LT | 4D LT | 5D LT | 3D 188 LT |
| Width (mm) | 1562 | 2343 | 3124 | 3905 | 1562 | 2343 | 3124 | 3905 | 1562 | 2343 | 3124 | 3905 | 1884 |
| Depth (mm) | 800 | | | | | | | | 945 | | | | |
| Height (mm) | 2000 / 2270 | | | | | | | | | | | | |
| Op. Temperature (°C) | 0~7 | | | | | | | | -18 | | | | |
| Temperature Grade | 3 M2 | | | | | | | | 3 L1 | | | | |
| Rated Voltage (V) | 220V | | | | | | | | | | | | |
| Rated Frequency (Hz) | 60Hz | | | | | | | | | | | | |
| Net Weight (kg) | 330 | 445 | 600 | 715 | 350 | 475 | 640 | 765 | 380 | 520 | 700 | 840 | 510 |
| Display Area (m ²) | 1.58 | 2.37 | 3.15 | 3.94 | 1.30 | 1.96 | 2.61 | 3.26 | 1.44 | 2.16 | 2.88 | 3.6 | 2.91 |
| Effective Volume (m ³) | 1.10 | 1.62 | 2.20 | 2.75 | 1.10 | 1.62 | 2.20 | 2.75 | 1.32 | 2 | 2.62 | 3.32 | 1.61 |
| Energy Efficiency | Grade 2 | | | | | | | | Grade 1 | | | | |

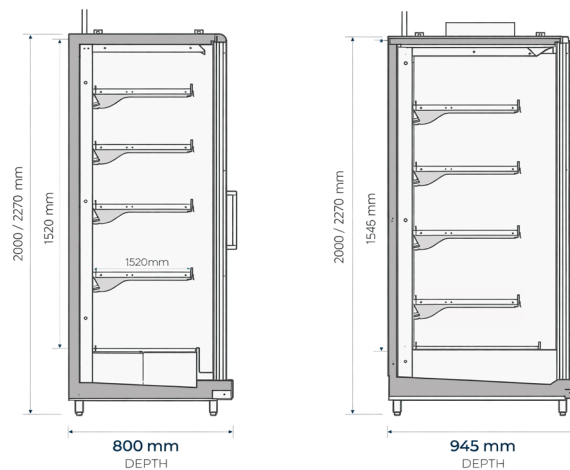


NOMENCLATURE

| COTOPAXI | | | | | | | |
|----------|----------------|---------|-----------------|---------------|-----------------|---------------------|--------------------------|
| 2D | L | 4 | LT | 15 | A | 5 | R |
| DOORS | DEPTH (mm) | SHELVES | CATEGORY | LENGTH (mm) | HEIGHT (mm) | REFRIGERANT | MODULE |
| 2D | | 2 | | 15 = 1562 | | 1 = Co2 | |
| 3D | E = 800 | 3 | LT = All | 23 = 2343 | A = 2000 | 2 = R290 | R = Remote |
| 4D | L = 945 | 4 | MT = 0~7 | 31 = 3124 | L = 2270 | 3 = Glycol | P = Plug in |
| 5D | | 5 | | 39 = 3905 | R = 1500 | 4 = R454C | SP = Semi Plug in |
| | | 6 | | 18 = End Case | | 5 = R449A | |
| | | | | | | 6 = HFC (R404/R507) | |



ALASKA

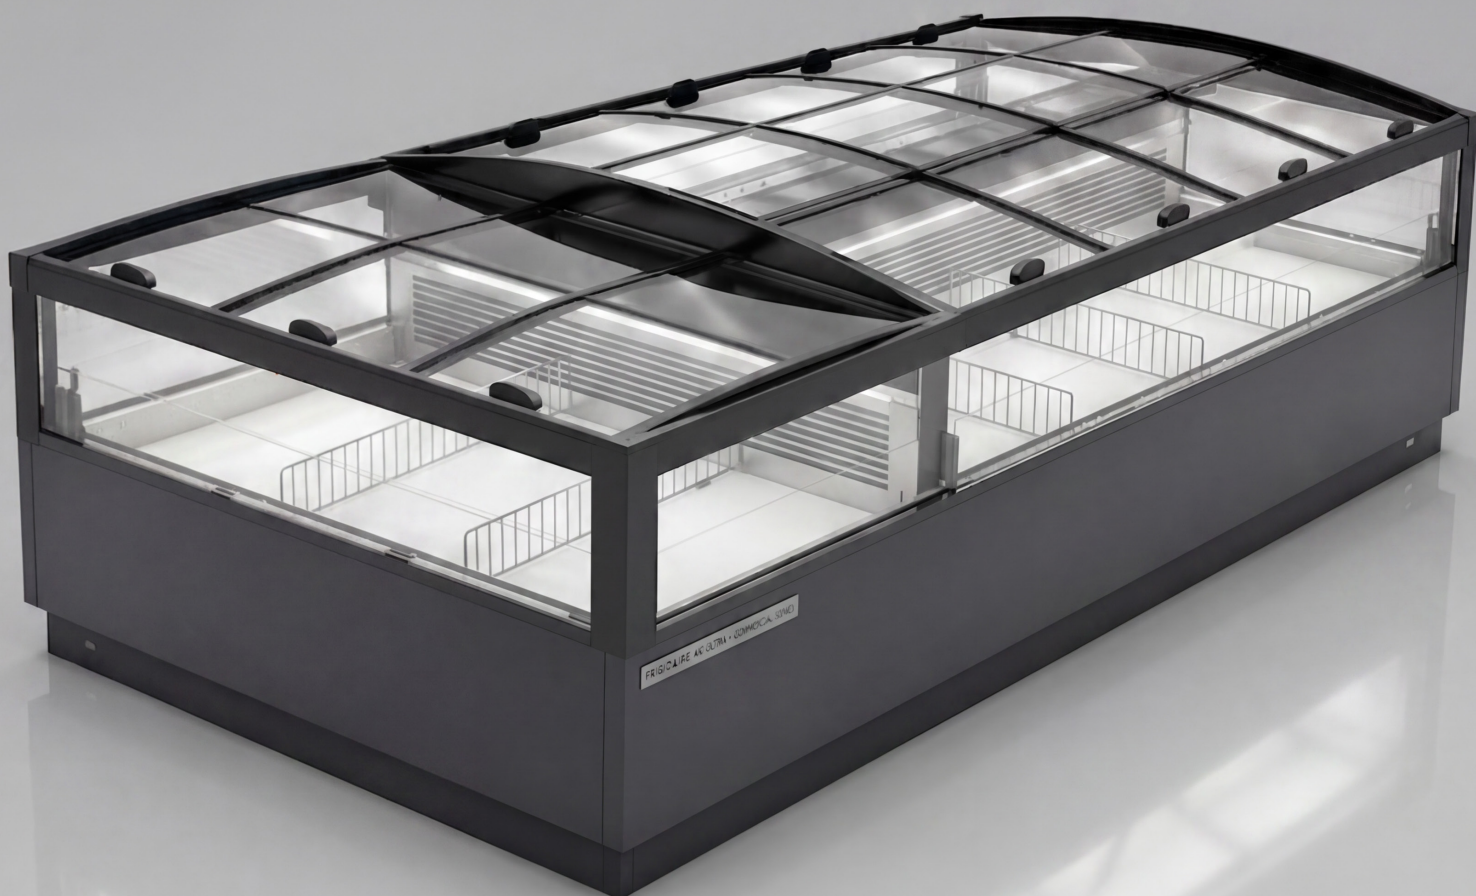

FREEZER ISLAND

ALASKA



High Efficiency
Energy Saving



Standard Power
Reliable operation



Temperature Range
Up to -18°C



Smart Control
Digital Controller



Climate Type
M3 environment



Display Options
End & glass panels



Flexible Access
Open or sliding glass



Tropical Ready
High Temp & Humidity



TEMPERATURE
RANGE

-18°C

WIDTH
(mm)

1250 – 3750

HEIGHT
(mm)

860

DEPTH
(mm)

1925

POWER

220 V / 60 HZ

EFFICIENCY

GRADE 2

TEMP GRADE

L1


CONFIGURATION

Open / Sliding
End units
Glass panels



ALASKA - FREEZER ISLAND

| STANDARD MODEL | OPEN OR WITH SLIDING GLASS DOOR | | | | | | | | 2 M (WIDTH) GLASS SIDE PANEL | 2 M (WIDTH) WRAPAROUND SIDE PANEL |
|-----------------------|------------------------------------|-------|-------|------|------|-------------|-------------|-------------|------------------------------------|---|
| | 1220 | 1820 | 2520 | 3720 | 920 | 1220 END | 1820 END | 2520 END | 2.0M GLASS | 2.0M GLASS WRAPAROUND |
| Width (mm) | 1250 | 1875 | 2500 | 3750 | 2018 | 2330 | 2955 | 3580 | 1925 | 2000 |
| Depth (mm) | 1925 | | | | | | | | 60 | 40 |
| Height (mm) | 860 | | | | | | | | 720 | 900 |
| Op. Temperature (°C) | ≤ 18 | | | | | | | | | |
| Temperature Grade | 3 L1 | | | | | | | | | |
| Rated Voltage (V) | 220V | | | | | | | | | |
| Rated Frequency (Hz) | 60Hz | | | | | | | | | |
| Net Weight (kg) | 245 | 301.5 | 391.5 | 585 | 416 | 470 | 526.5 | 616.5 | | |
| Display Area (m²) | 1.86 | 2.79 | 3.72 | 5.59 | 2.79 | 3.26 | 4.19 | 5.12 | | |
| Effective Volume (m³) | 0.63 | 0.95 | 1.30 | 1.90 | 0.91 | 1.07 | 1.39 | 1.74 | | |
| Energy Efficiency | Grade 2 | | | | | | | | | |

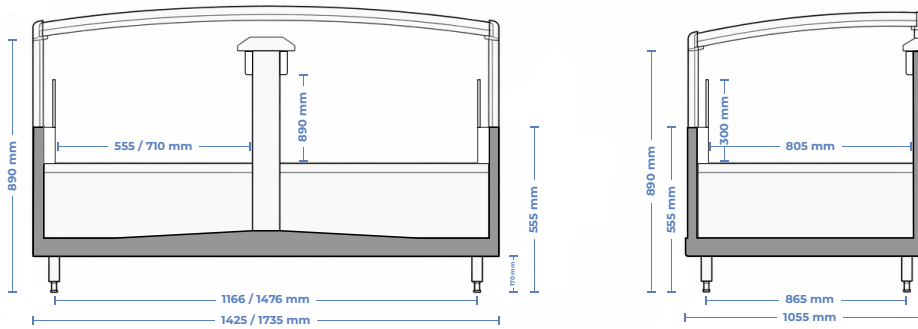

NOMENCLATURE

| ALASKA | | | | | | |
|--|--|---|--|----------------------------------|--|---|
| W | 20 | MT | 25 | A | 5 | R |
| TYPE | DEPTH (mm) | CATEGORY | LENGTH (mm) | HEIGHT (mm) | REFRIGERANT | MODULE |
| W = Dual S = Single EC = End Case | 10 = 1020 15 = 1425 18 = 1735 20 = 1925 | LT = -18 MT = 2~-8 DT = Dual | 12 = 1250 18 = 1875 25 = 2500 37 = 3750 | A = 860 L = 890 | 1 = Co2 2 = R290 3 = Glycol 4 = R454C 5 = R449A 6 = HFC (R404/R507) | R = Remote P = Plug in SP = Semi Plug in |



COLUMBIA



DELI MEAT
Service counter
Lift up glass

COLUMBIA



DELI MEAT
Self-service counter

COLUMBIA



GRAVITY SERVICE
Counter
Pull Down Glass

COLUMBIA



MODULAR COUNTER SYSTEM

COLUMBIA



Multiple Formats
Service & self-service



Modular Design
Flexible configurations



Temperature Range
-1 ~ 5°C



Smart Control
Digital Controller



Climate Type
M3 design



Glass Options
Straight & curved



Energy Efficient
Higher evap. temp



Tropical Ready
High Temp & Humidity



**TEMPERATURE
RANGE**

-1 ~ 5°C

**WIDTH
(mm)**

1250 – 3750

**HEIGHT
(mm)**

1172
1190
1317

**DEPTH
(mm)**

795
838
850

POWER

220 V / 60 HZ

APPLICATION

Meat / Deli

CONFIGURATION

Service
Self-service
Gravity



DELI MEAT - SERVICE COUNTER

| STANDARD MODEL | CURVED GLASS DEPTH DECK DIMENSION - 850MM | | | | |
|-----------------------|---|------|------|------|------|
| | 12 | 18 | 25 | 37 | 9E |
| Width (mm) | 1250 | 1875 | 2500 | 3750 | 1260 |
| Depth (mm) | 1116 | | | | 1260 |
| Height (mm) | 1172 | | | | |
| Op. Temperature (°C) | -1~5 | | | | 4~10 |
| Rated Voltage (V) | 220V | | | | |
| Rated Frequency (Hz) | 60Hz | | | | |
| Net Weight (kg) | 0.92 | 1.26 | 1.59 | 2.26 | 0.9 |
| Effective Volume (m³) | 320 | 390 | 530 | 750 | 170 |

GRAVITY COIL - SERVICE COUNTER

| STANDARD MODEL | CURVED & STRAIGHT UP GLASS DECK DIMENSION - 795MM | | | |
|-----------------------|---|------|------|------|
| | 12 | 18 | 25 | 37 |
| Width (mm) | 1250 | 1875 | 2500 | 3750 |
| Depth (mm) | 1104 | | | |
| Height (mm) | 1317 | | | |
| Op. Temperature (°C) | -1~5 | | | |
| Rated Voltage (V) | 220V | | | |
| Rated Frequency (Hz) | 60Hz | | | |
| Net Weight (kg) | 0.92 | 1.43 | 1.86 | 2.77 |
| Effective Volume (m³) | 193 | 259 | 346 | 519 |

NOMENCLATURE



| COLUMBIA | | | | | | | |
|---|-------------|---|---|--|--|--|---|
| SG | 1 | 79 | M | 25 | T | 5 | R |
| TYPE | SHELVES | DEPTH (mm) | CATEGORY | LENGTH (mm) | HEIGHT (mm) | REFRIGERANT | MODULE |
| SF = Service Straight Glass Forced Air SG = Service Straight Glass Gravity SH = Service Straight Glass Hot Foods CF = Service Curved Glass Forced Air CG = Service Curved Glass Gravity CH = Service Curved Glass Hot Foods SS = Self Service Forced Air | 0 1 2 | 79 = 795 85 = 855 87 = 870 | D = All M = Meat H = Hot | 12 = 1250 18 = 1875 25 = 2500 37 = 3750 9E = 90° exterior angle | A = 878 L = 1225 T = 1317 w = 865 | 1 = Co2 2 = R290 3 = Glycol 4 = R454C 5 = R449A 6 = HFC (R404/R507) | R = Remote P = Plug in SP = Semi Plug in |





MODULAR COUNTER SYSTEM

COLUMBIA



SERVICE COUNTER

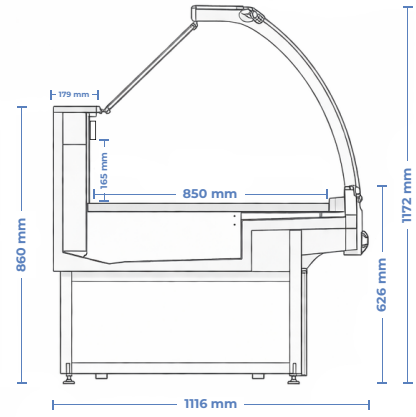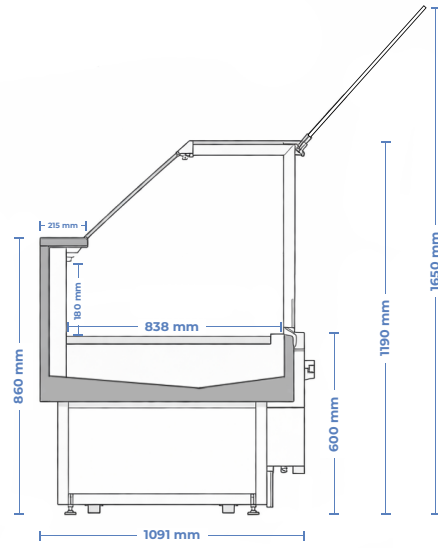


SELF SERVICE

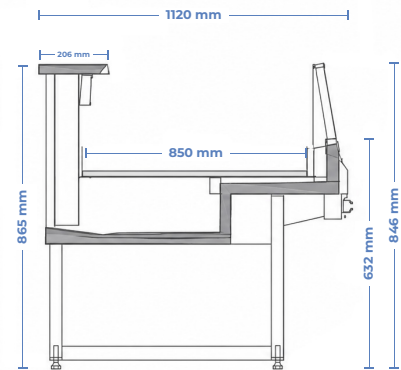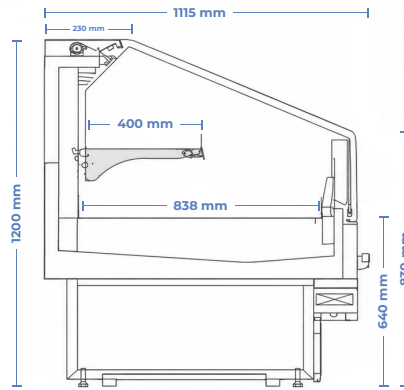

GRAVITY

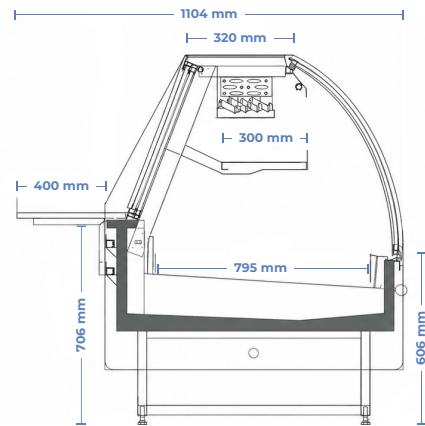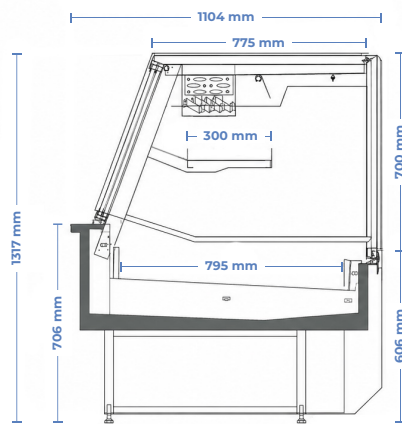

COLUMBIA WC

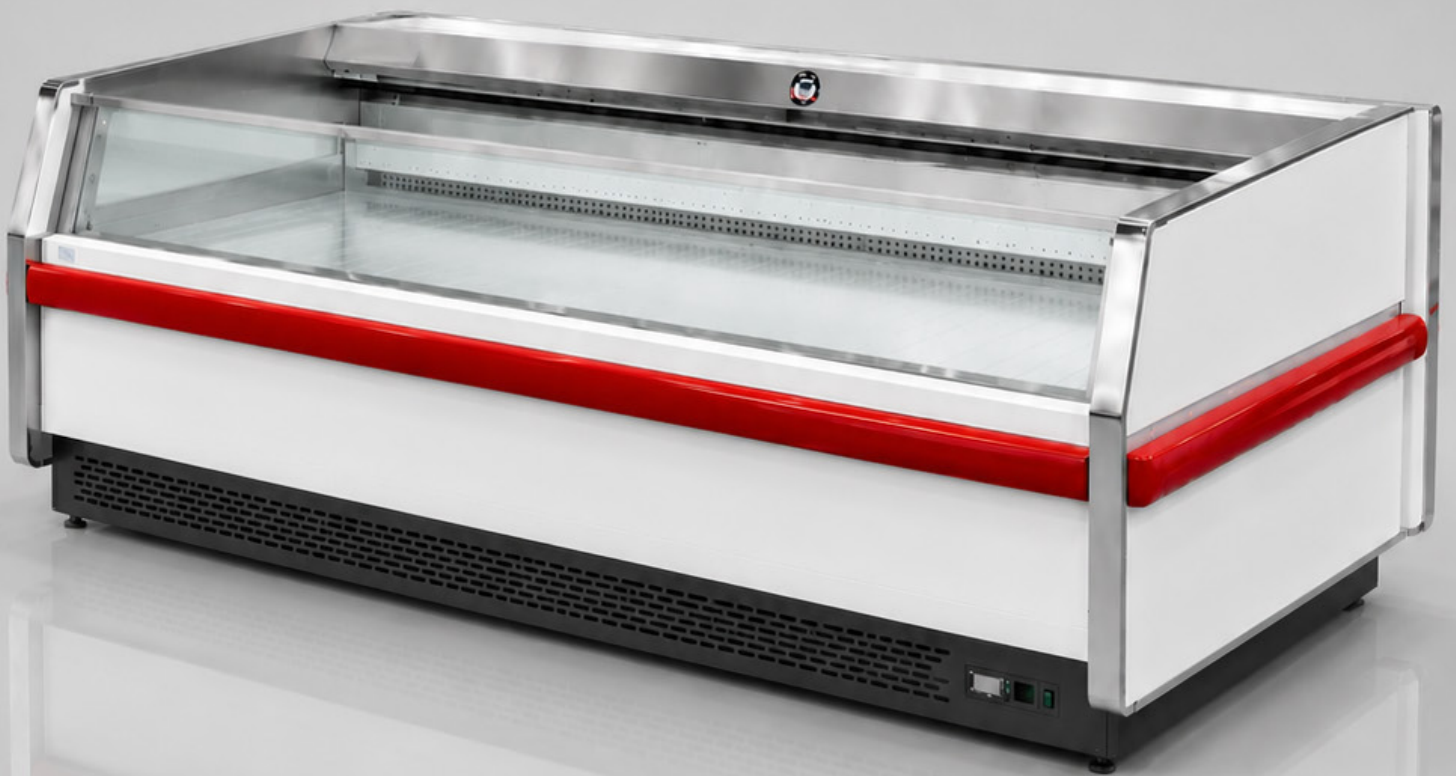

DELI MEAT Warehouse Club

COLUMBIA WC



High Efficiency

Higher Evap. Temp $\geq -5^{\circ}\text{C}$



Standard Power

Reliable electrical integration



Optimal Cooling

Stable temperature



Smart Control

Mechanic Controller



Climate Type

25°C 60% RH



Capacity

$6.41\text{ m}^2 \cdot 3462\text{ L}$



Energy Efficient

Lower operating cost



Tropical Ready

High Temp & Humidity



TEMPERATURE RANGE

$-2 \sim 5^{\circ}\text{C}$
 $-18 \sim -22^{\circ}\text{C}$

WIDTH (mm)

1875

HEIGHT (mm)

2050

DEPTH (mm)

1050

POWER

220 V / 60 HZ

REFRIGERANT

R404A

APPLICATION

Beverages
Dairy



LOGAN WC

| | | |
|---------------------------------------|--|----------|
| Cabinet type | Open multideck (air curtain) | |
| Application | Beverages, dairy products | |
| Temperature range (°C) | -1~7°C | |
| Refrigerant | R404A | |
| Evaporating temperature (°C) | -5°C | |
| Cooling capacity (kW) | 5.08 | 6.40 |
| Ambient conditions | 25°C 60% | 27°C 70% |
| Power supply | 220V 50Hz | |
| Defrost heater (W/A) | / | / |
| Anti-condensation heater (W/A) | 60 | 0.27 |
| Fan motor (W/A) | 180 | 0.82 |
| Lighting (W/A) | 240 | 1.09 |
| Pipe diameter | Liquid 3/8" Suction 3/4" | |
| Controller | HK-90W | |
| Expansion valve | Thermostatic expansion valve | |
| External dimensions (mm) | 3750×1050×2050 | |
| Packaging dimensions (mm) | 3930×1166×2225 | |
| Insulation | Rigid polyurethane foam | |
| Display area (m ²) | 6.41 | |
| Net volume (L) | 3462 | |
| Opening width (mm) | 1491 | |
| Shelf dimensions (mm) × No. of levels | 500×4 | |
| Kick plate width (mm) | 780 | |
| Net weight (kg) | 513 | |
| Gross weight (kg) | 618.2 | |
| Drain pipe diameter | Ø50 | |
| Standard accessories | Rubber drain trap | |
| Optional accessories | Glass, solid with mirror, solid side panel | |

NOMENCLATURE

| LOGAN | | | | | | |
|---------------------|-----------------------|---------------------|--|----------------------|---|--|
| L | 4 | D | 25 | A | 5 | R |
| DEPTH (mm) | SHELVES | CATEGORY | LENGTH | HEIGHT | REFRIGERANT | MODULE |
| E = 855 L = 1055 | 2 3 4 5 6 | D = All M = Meat | 12 = 1250 17 = 1700 18 = 1875 21 = 2100 25 = 2500 37 = 3750 9E = 90° Ext 9I = 90° Int | A = 2000 L = 2270 | 1 = Co2 2 = R290 3 = Glycol 4 = R454C 5 = R449A 6 = HFC (R404/R507) | R = Remote P = Plug in SP = Semi Plug in |

